




SOLID-STATE POCKELS CELL DRIVER

- ADJUSTABLE OUTPUT TO -3.5kV
- ≤ 30ns RISETIME, 150µs RECOVERY
- RUGGED SOLID-STATE DESIGN
- SELF-CONTAINED HIGH VOLTAGE POWER SUPPLY
- COMPACT SURFACE MOUNT DESIGN
- OPTO-ISOLATED OR TTL TRIGGER OPTIONS

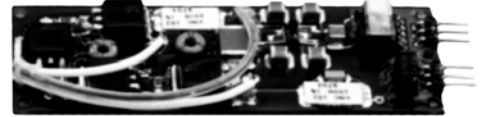

DESCRIPTION:

The **825 Series** Pockels cell drivers are designed for continuous pulsed applications, such as controlled Q-switching of lasers. Solid-state MOSFET technology is used, giving excellent trigger noise immunity and a smooth output waveform. This technique eliminates common problems associated with krytron, avalanche and transformer drivers. Amplitude is continuously variable by adjusting the internal high voltage power supply. Options for triggering include an active high opto-isolator and TTL logic. Pulse amplitudes to -3.5kV are available.

SPECIFICATIONS:

Trigger Input	TTL/CMOS compatible, positive logic, > 2.5V, high impedance, internally limited to +5V via 1kΩ load (825-1) Opto-Isolated, active high current of 10mA (825-2)
Pulsewidth	≥ 300ns to 25µs
Repetition Rate	Up to 100pps, burst mode permissible
Power	+15VDC ± 0.5V at 20mA to 100mA depending on PRF and output voltage
Temperature	0° to 70° C
Connectors	
Input	4 pin connector
Output	12" flying leads

Output	
Voltage	0 to -3.5kV
Load	Tested with 47pF, 100MΩ
Risetime	≤ 30ns
Recovery	≤ 150µs
Pulsewidth	1 to 3µs at 97%
Voltage Control	Internal multi-turn trimpot External (add -EXT to part number) When using external mode: 4V control yields 0V output 8.2V control yields -3.5kV output
Monitor	HV Monitor lead to monitor HV prior to pulse (add -HV to part number)
Size	3.73" L x 1.25" W x 0.48" H
Weight	1.8 oz.

Caution:
Mounting hardware must be Non-Conductive.
Nylon hardware is provided.



Specifications subject to change without notice.


Consult factory for applications in which optical cavity could be sensitive to bonding chemicals.

APPLICATIONS:

Driving E-O Q-Switches for Q-Switching Solid-State Lasers, High Voltage Pulser

		MODEL NUMBER	
		OUTPUT SWING	
		0 to -3.5kV	
INPUT VOLTAGE	+15V ± 0.5V	825-1	825-2
TRIGGER		TTL	OPTO-ISOLATED

Typical Part Number: 825-2-HV = Input Voltage: +15V ± 0.5V
 Output Voltage: 0 to -3.5kV
 Trigger: Opto-isolated, active high current of 10mA
 Voltage Control: Internal multi-turn trimpot
 HV Monitor: HV monitor lead provided to set HV prior to pulsing

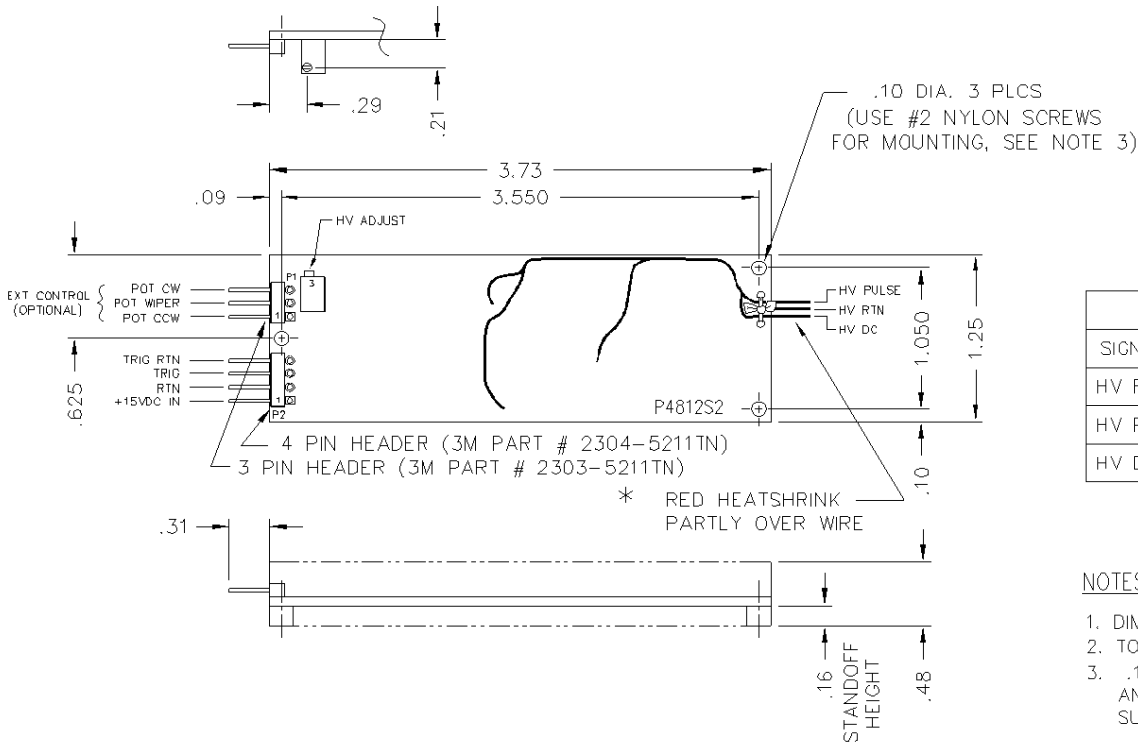


OUTPUT	
SIGNAL NAME	COLOR
HV RTN	BLACK
HV PULSE	WHITE
HV DC	WHT/RED *


NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS ARE IN INCHES.
2. TOL: .XX ± .03, .XXX ± .010
3. .16 LONG MOUNTING SPACERS AND .56 LONG NYLON SCREWS SUPPLIED WITH UNIT.

825-2 EQUIVALENT SIMPLIFIED CIRCUIT

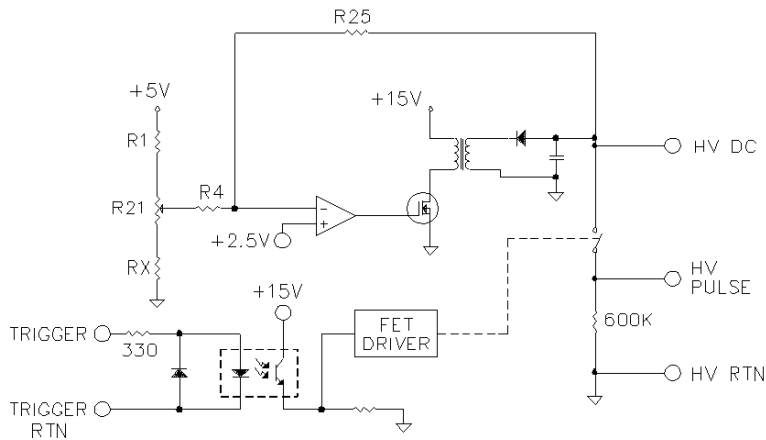

TYPICAL OUTPUT PULSE

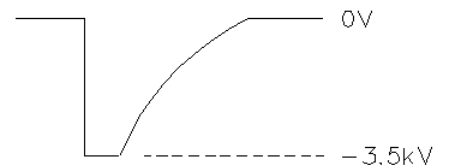

CAUTION: Mounting hardware must be Non-Conductive. Nylon hardware is provided.