


SOLID-STATE POCKELS CELL DRIVER

- ADJUSTABLE OUTPUT TO -3.5kV
- $\leq 30\text{ns}$ RISETIME, $150\mu\text{s}$ RECOVERY
- RUGGED SOLID-STATE DESIGN
- SELF-CONTAINED HIGH VOLTAGE POWER SUPPLY
- COMPACT SURFACE MOUNT DESIGN
- OPTO-ISOLATED OR TTL TRIGGER OPTIONS

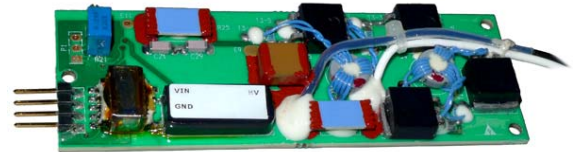

DESCRIPTION:

The **825A Series** Pockels cell drivers are designed for continuous pulsed applications, such as controlled Q-switching of lasers. Solid-state MOSFET technology is used, giving excellent trigger noise immunity and a smooth output waveform. This technique eliminates common problems associated with krytron, avalanche and transformer drivers. Amplitude is continuously variable by adjusting the internal high voltage power supply. Options for triggering include an active high opto-isolator and TTL logic. Pulse amplitudes to -3.5kV are available.

SPECIFICATIONS:

Trigger Input	TTL/CMOS compatible, positive logic, > 2.5V, high impedance, internally limited to +5V via 1k Ω load (825A-1) Opto-Isolated, active high current of 2.5mA (825A-2)	Output	Voltage	0 to -3.5kV
Pulsewidth	$\geq 300\text{ns}$ to $25\mu\text{s}$	Load	Tested with 47pF, 100M Ω	
Repetition Rate	Up to 100pps, burst mode permissible	Risetime	$\leq 30\text{ns}$	
Power	+15VDC \pm 0.5V at 20mA to 100mA depending on PRF and output voltage	Recovery	$\leq 150\mu\text{s}$	
Temperature	-40 $^{\circ}$ to +85 $^{\circ}$ C	Pulsewidth	1 to 3 μs at 97%	
Connectors		T _{delay in-out}	< 250nsec (typical)	
Input	4 pin connector	T _{jitter}	< 5nsec (typical)	
Output	12" flying leads	Voltage Control	Internal multi-turn trimpot External (add -EXT to part number) When using external mode: 4V control yields 0V output 8.2V control yields -3.5kV output	
		Monitor	HV Monitor lead to monitor HV prior to pulse (add -HV to part number)	
		Size	3.73" L x 1.25" W x 0.48" H	
		Weight	1.8 oz.	

Caution:
Mounting hardware must be Non-Conductive.
Nylon hardware is provided.




Specifications subject to change without notice. Consult factory for applications in which optical cavity could be sensitive to bonding chemicals.

APPLICATIONS:

Driving E-O Q-Switches for Q-Switching Solid-State Lasers, High Voltage Pulser

		MODEL NUMBER	
		OUTPUT SWING	
		0 to -3.5kV	
INPUT VOLTAGE	+15V ± 0.5V	825A-1	825A-2
TRIGGER		TTL	OPTO-ISOLATED

Typical Part Number: 825A-2-HV = Input Voltage: +15V ± 0.5V
 Output Voltage: 0 to -3.5kV
 Trigger: Opto-isolated, active high current of 2.5mA
 Voltage Control: Internal multi-turn trimpot
 HV Monitor: HV monitor lead provided to set HV prior to pulsing


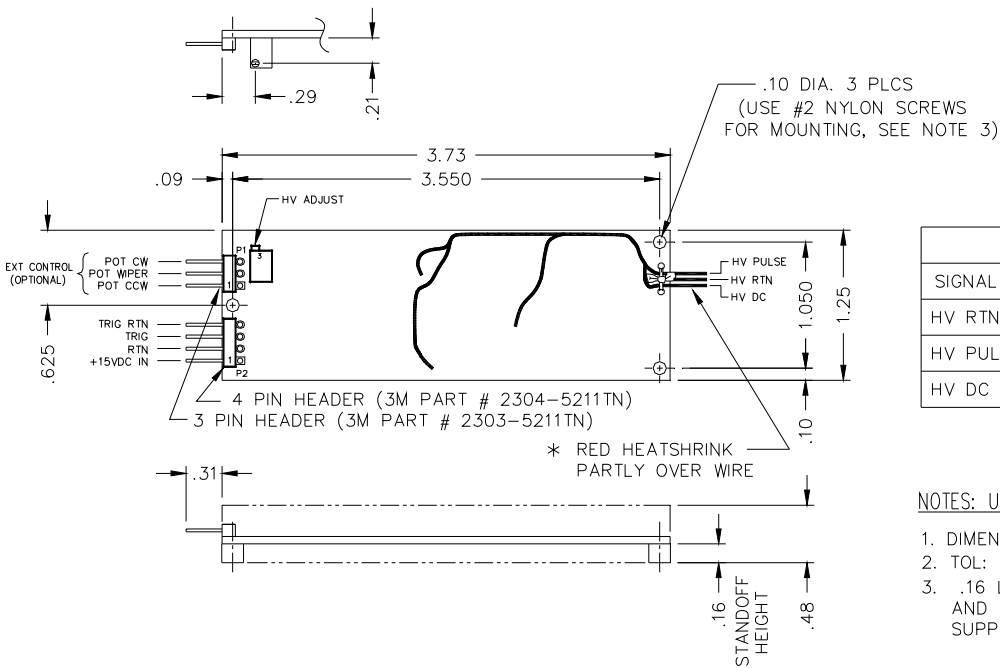


OUTPUT	
SIGNAL NAME	COLOR
HV RTN	BLACK
HV PULSE	WHITE
HV DC	WHT/RED *

NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS ARE IN INCHES.
2. TOL: .XX ± .03, .XXX ± .010
3. .16 LONG MOUNTING SPACERS AND .56 LONG NYLON SCREWS SUPPLIED WITH UNIT.

825A-2 EQUIVALENT SIMPLIFIED CIRCUIT

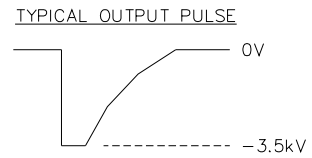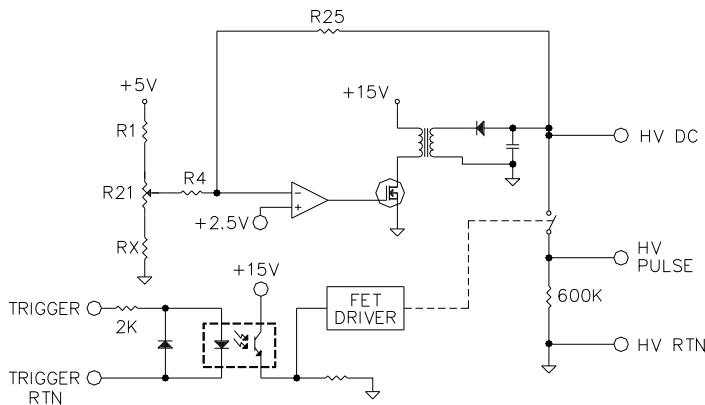

P7513_2

CAUTION: Mounting hardware must be Non-Conductive. Nylon hardware is provided.